



EC-type examination certificate

Registration number / Reference mark C3428NOIR

The company

NoIR Laser Company, LLC

6155 Pontiac Trail
SOUTH LYON MI 48178

Applicant's code NOIR

hereby receives the confirmation that the product/s

laser protection filter

of the type

IRD3 / IRD3 4 and 8 base

conforms to

**Rules 89/686/EWG
DIN EN 207:2002-12**

Test report(s): 77369-PTB-02, 11434-PZA-05, 1030-PZA-07


Identification Information see annex

See annex for further information.

DIN CERTCO GmbH
Prüf- und Zertifizierungszentrum Aalen
Gartenstraße 133, 73430 Aalen Germany



2007-04-24
Dipl.-Ing. (FH) Stefan Merkel
Notified Body 0196

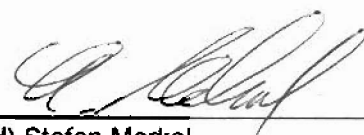

Annex

to the Certificate with Registration No. C3428NOIR, dated 2005-10-06

Herewith, DIN CERTCO PZA certifies that the model is in compliance with the basic requirements of the Directive 89/686/EEG for personal protective equipment. The certificate is based both / either on the tests and / or on the technical documentation submitted by the manufacturer.

Test report(s)

77369-PTB-02, 11434-PZA-05, 1030-PZA-07

Name and address of DIN CERTCO Prüf- und Zertifizierungszentrum Aalen as the notified body - identification no. 0196 are to be indicated in the information brochure for the product.

This eye-protection is to be marked on the oculars and/or the frames. The marking must include:

Laser mode of operation	Spectral range in nm	Shade/ scale number	Identification
-------------------------	----------------------	---------------------	----------------

IRD3

DR	180 to 315	L6+L4	180-315 D L6 + R L4 NOIR CE
DR	>315 to 400	L4	>315-400 DR L4 NOIR CE
DIR	700 to 770, >1840 to 1950	L1	700-770, >1840-1950 DIR L1 NOIR CE
DIR	>770 to 820, >1400 to 1840	L2	>770-820, >1400-1840 DIR L2 NOIR CE
DIR	>820 to 865, >1145 to 1400	L3	>820-865, >1145-1400 DIR L3 NOIR CE
DIR	>865 to 1145	L4	>865-1145 DIR L4 NOIR CE
IR	940 to 1064	L5	940-1064 IR L5 NOIR CE

IRD3 4 and 8 base

DR	180 to 315	L6+L4	180-315 D L6 + R L4 NOIR CE
DR	>315 to 400	L4	>315-400 DR L4 NOIR CE
DIR	700 to 770, >1840 to 1950	L1	700-770, >1840-1950 DIR L1 NOIR CE
DIR	>770 to 820, >1400 to 1840	L2	>770-820, >1400-1840 DIR L2 NOIR CE
DIR	>820 to 865, >1145 to 1400	L3	>820-865, >1145-1400 DIR L3 NOIR CE
DIR	>865 to 1145	L4	>865-1145 DIR L4 NOIR CE
IR	940 to 1064	L5	940-1064 IR L5 NOIR CE

Additional product specification